CORE

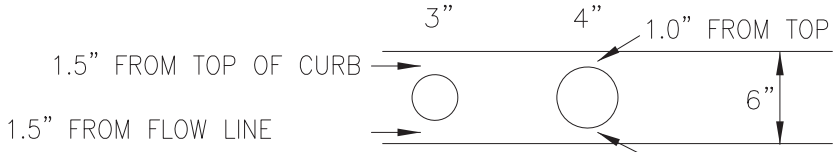

* MUST GROUT AROUND PIPE
* MUST KEEP PIPE RECESSED 1/4" FROM FACE OF CURB

CURB CUT FOR PIPE PLACEMENT

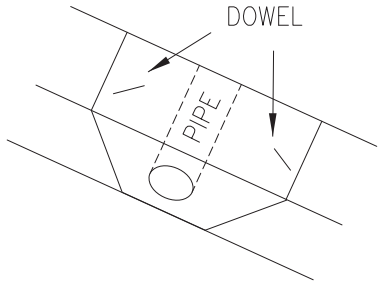

* MINIMUN LENGTH OF CUT IS 15" MAX CUT IS 20" AT TOP
* SAW CUT 4" CENTER DOWN TO 1" ABOVE FLOW LINE
* SAW CUT BOTH SIDES AT 45 DEGREES ANGLE .
* BOTH SIDES MUST HAVE 1 DOWEL ON EACH SIDE CENTERED TO SECURE THE CONCRETE AND PIPE

LOCATION OF CURB CUT OR CORE

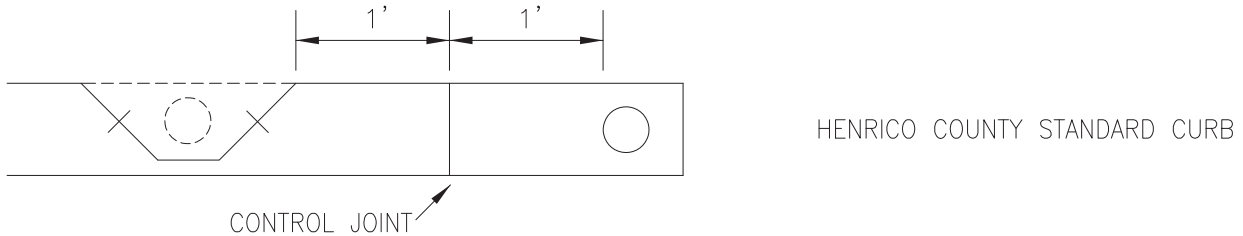

* THE CURB CUT OR CORE HOLE MUST BE A MINIMUM OF 1' FROM THE CONTROL JOINT

3" OR 4" PIPE CORE AND CURB CUT DETAIL

County of Henrico
Department of Public Works

SEPTEMBER 1, 2021

C–35.DWG

C-35