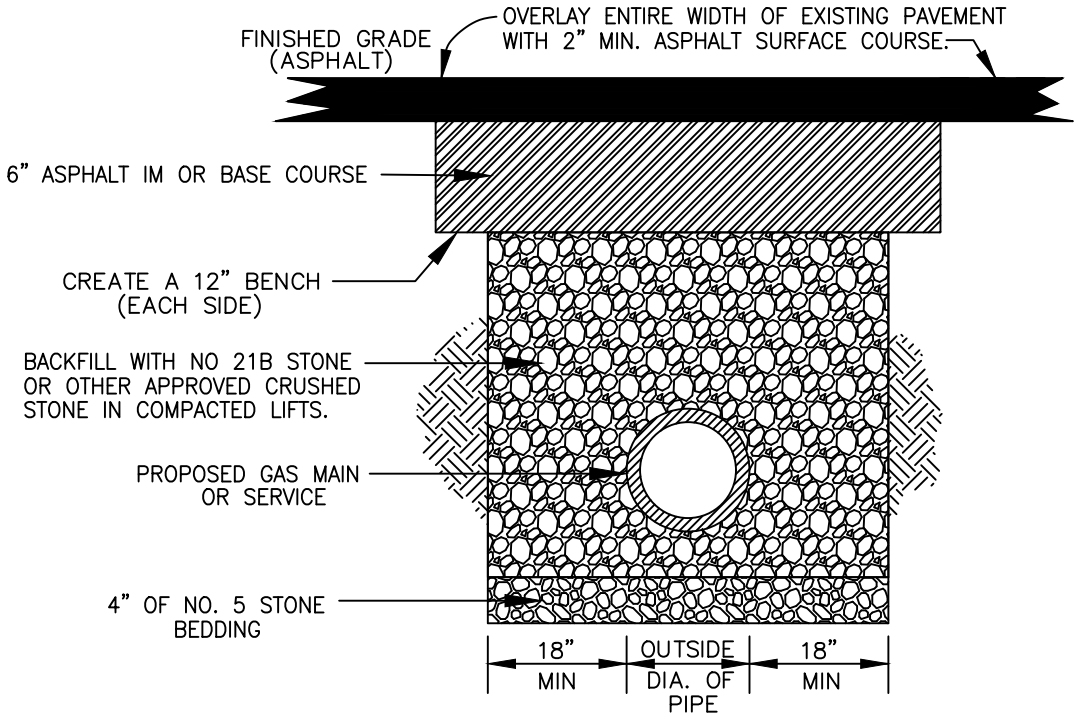

SKETCH SHOWING PAVEMENT OVERLAY
FOR LONGITUDINAL OR MULITPLE CUTS

NOTES:

1. BACKFILL AROUND THE GAS MAIN / SERVICE MUST BE PERFORMED IN ACCORDANCE WITH FCC GUIDELINES.

2. THE GAS TRENCH SHALL INCLUDE A 12" BENCH, TOPPED WITH 6" OF INTERMEDIATE OR BASE ASPHALT.

3. UPON COMPLETION OF GAS LINE INSTALLATION, A 2" MILL AND OVERLAY SHALL BE APPLIED ACROSS THE FULL WIDTH OF ALL AFFECTED LANES.

PAVEMENT REPLACEMENT, BEDDING AND BACKFILL FOR GAS MAIN / SERVICE

County of Henrico
Department of Public Works

APRIL 21, 2025

C-28a.DWG

C-28A